


P1 12 Pin Deutsch, A Key

Pin# Function

- 1) +14 V
- 2) Control #1 Output-relay Coil, 72 W To +14 Vdc
- 3) Control #2 Output-relay Coil, 72 W To +14 Vdc
- 4) N/a
- 5) N/a
- 6) Ballast Gauge #1 Sender Input
- 7) Ballast Gauge #2 Sender Input
- 8) Ballast Gauge #3 Sender Input
- 9) N/a
- 10) N/a
- 11) Control #3 Output-relay Coil, 72 W To +14 Vdc
- 12) Ground

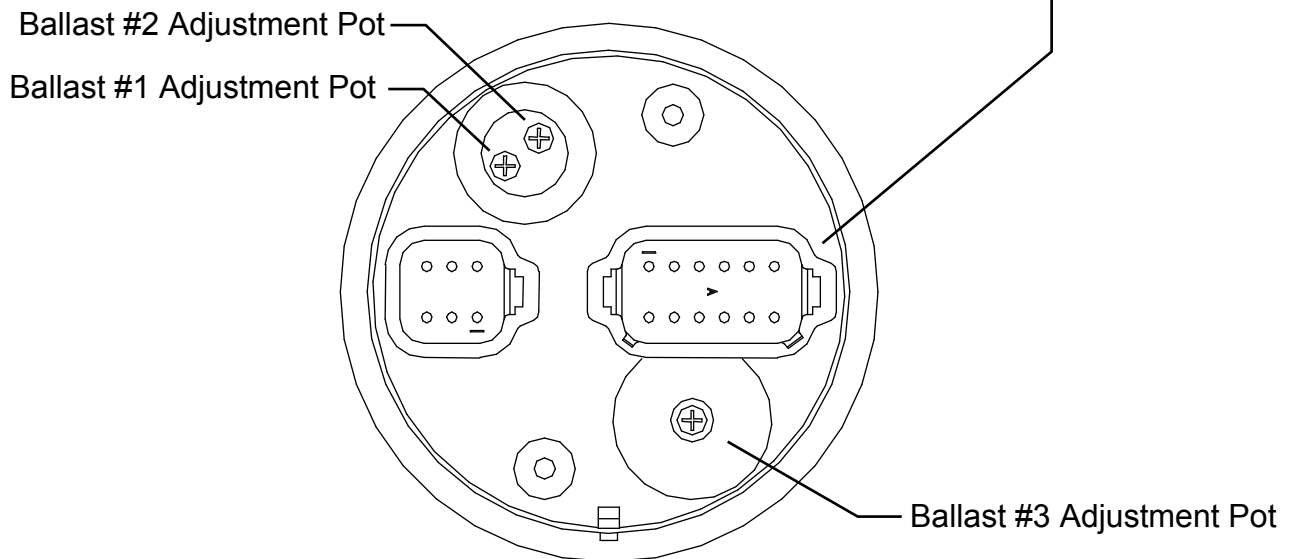

Controller Is Pre Set At Factory To Nominal Values
If Adjustment Is Necessary, Remove Plug To Access Corresponding Ballast Tank Adjustment Potentiometer.